


Dimension: 17.7cm H X 13.5cm W (folded size)


2.



4) Remove the 4 screws on cover, then remove the left cover (1.5mm hex bit).

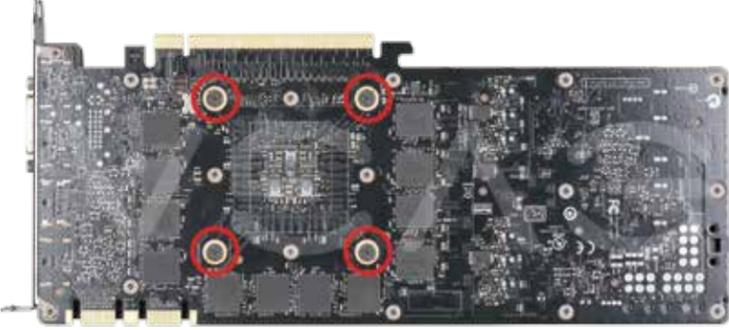

3) Remove the 4 spring screws on the back side of the card (#1 Phillips Bit) this will allow the heatsink to be removed.

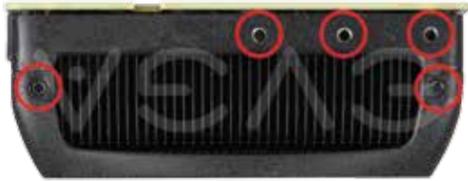

1.



2) The shroud is held by 10 screws, remove them. (See pictures below.) You will need a 2mm hex bit for the chrome bolts on the side and a 1.5mm hex bit for all others.



1) First remove the bracket by removing the 5 screws on the bracket, the perpendicular screw holding the bracket to the PCB, and the 2 standoffs on the DVI port. (#1 Phillips bit)

12G-P4-2990-KR / 12G-P4-2992-KR instructions.


Please be sure to keep your original shroud and fasteners so it can be returned to how it was received in case you ever need to submit for warranty.

The following instructions and pictures are provided to assist you installation of the EVGA GTX™ Titan X Hybrid Cooling Kit to the Reference Blower design of GTX™ Titan X graphics card. Please be careful installing the hybrid, there are several very small fasteners used which can be stripped if you are not careful.

14) Attach the shroud to the card, you can use the hoses and the fan as alignment marks. It will use the 8 bolt holes the original shroud used. Please use the included screws for the new shroud. (#1 Phillips bit) **Please see step 2 for screw locations.**



15) Realign the bracket with the back of the card and replace the 6 screws and 2 standoffs removed in the first step.

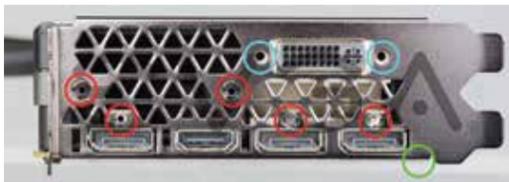

Important Information

EVGA GTX™ TITAN X Hybrid Kit is AIO Water Cooling System, you do not need to add any coolant, and the system is completely self-contained. EVGA GTX™ TITAN X Hybrid Kit has already done leaking test at the factory before shipping to the customers.

The EVGA GTX™ TITAN X Hybrid Kit is exclusive only to the NVIDIA® Reference PCB/Air cooling GTX™ TITAN X graphics card and was not designed to fit on any other graphics card.

Warranty for the GTX™ TITAN X Hybrid Kit

Your EVGA TITAN X Hybrid kit comes with a 1 (one) year warranty. Refer to your GTX™ TITAN X manufacturer's warranty information before installing the EVGA GTX™ TITAN X Hybrid Kit. Should you damage your GTX™ TITAN X during the installation process, EVGA will not be held liable for the physical damage of your GTX™ TITAN X, Hybrid kit, case, motherboard or any associated hardware when damage is caused by improper installation.

7.

E009-00-000128



GEFORCE® GTX™ TITAN X HYBRID

Installation Guide



Color info : CMYK

For GTX TITAN X Hybrid Waterblock

Dimension: 17.7cm H X 13.5cm W (folded size)



5) Now remove the heatsink and set it aside. We suggest cleaning the bottom of the heatsink, as the thermal compound left there can smear and spread.



6) Remove the 4 screws holding the center portion of the shroud, and remove it. (#000 Philips bit)



3.

9) Be sure to clean the GPU (see pic) with alcohol (preferably 90%) removing all thermal compound.



10) The included rubber cap (see front and back picture below) is attached to the framing of the card and this is where the tubes will be held into place.



11) Remove the plastic cap on water block, use the 4 Spring Screws previously removed to mount the block on the GPU (Thermal compound is pre-applied to the block).



5.

7) Remove the remaining 2 screws (#000 Philips bit) and remove the last section of the shroud.



8) Unplug the LED header.



4.

12) Unplug the power for the existing fan plug in the waterblocks pass through power cable into the cards power header, then reattach the fan to the card via the pass through. Make sure the wires do not touch the fan; please use included strips of tape to attach the wires to the plastic around the perimeter of the fan.



13) The secondary 3 pin cable from the waterblock powers the fan for the radiator. Attach it, and for ease of cable routing, you can use the included ties to attach the cable to the hose.



6.

Color info : CMYK

For GTX TITAN X Hybrid Waterblock